

Quick Installation Guide


Wireless N Broadband Router

Suitable for: N150RT, N300RT, N151RT, N301RT,
N150RH, N300RH, N302R Plus

V3.1507

Copyrights © 2015 by TOTOLINK All rights reserved. Website: <http://www.totolink.net>
Information in this document is subject to change without prior notice.

1 Hardware Installation

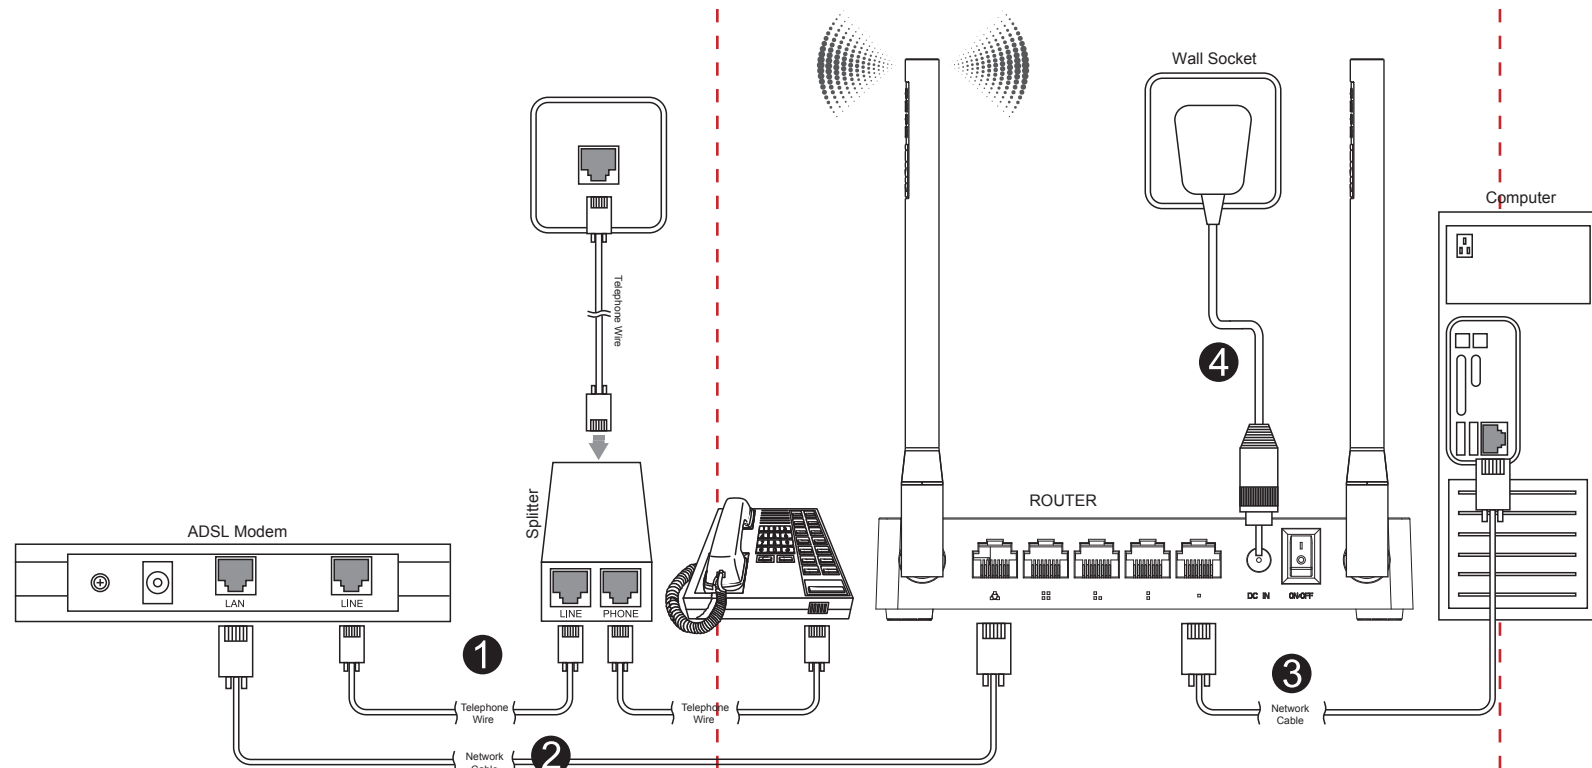

LED Indicators

POWER	Light on when router is power on.
CPU	Light is on when systems is working.
WiFi	The indicator light is on when Wi-Fi is enabled.
WAN	Light on when WAN port connected successfully. Light blinking while transmitting or receiving data.
1/2/3/4LAN	Light on when the LAN port successful connected. Light blinking while transmitting or receiving data.

Ports Description

DC IN	Used for connecting the power adapter.
ON/OFF	Used for power on or off the router.
1/2/3/4LAN	Used for connecting the router to local PC.
WAN	Used for connecting the router to the Internet.
Reset/WPS	Reset: Press the button for more than 5 seconds, the router will restore factory settings. WPS: Press the button less than 5 seconds, enable the router WPS function.

NOTE:

1. Please disconnect the power adapter and all cables during thunderstorm weather.
2. Keep away from heat source and keep well ventilated.
3. Please pay attention to the waterproofing and moisture-proof when storing, transporting and running.
4. The power supply must reach the rated current and power.
5. Put the router in flat places.

2 Set Up PC

Windows Vista/7 For Windows Vista or Windows 7 Operating System, please comply with following steps to set up.

- 1 Click "Start—Control Panel—Network and Internet—Network Connection", right-click "Local Area Connection", and choose "Properties".
- 2 Double-click "Internet Protocol Version 4 (TCP/IPv4)".
- 3 Choose "Obtain an IP address automatically" and "Obtain DNS server address automatically", click "OK". And then click "OK".

Windows 8 For Windows 8 Operating System, please comply with following steps to set up.

- 1 Click "Start—Control Panel—Network and Sharing Center—Change adapter setting", right-click "Ethernet", and choose "Properties".
- 2 Double-click "Internet Protocol Version 4 (TCP/IPv4)".
- 3 Choose "Obtain an IP address automatically" and "Obtain DNS server address automatically", click "OK". And then click "OK".

3 Set Up Router

Please set up the router following below steps.

- 1 Run the Web browser.
- 2 Type 192.168.1.1 in the web browser, then press Enter key.
- 3 Enter User Name and Password (the default User Name and Password are "admin"), then click LOGIN or press Enter key.

- 4 Now you have logged in the Easy Setup interface.
- 5 Choose the WAN connection type and enter the parameters provided by your ISP.

- 6 Here we take PPPoE as example. User Name and Password are required.
- 7 For Wireless Settings, you can setup SSID (network name) and encryption.
- 8 By default, no encryption selected. Here WPA2 Mixed is recommended for you to protect your network, then type in your password.

- 9 On this page, you can also enable or disable IPTV. If enable this function, please enter the VLAN ID and choose correct IPTV port. Then click Apply to save the settings.
- 10 Wait for a while, Internet connected successfully! Please click finish.

- 11 Now the router's Status interface turns up, it shows connected type and IP address & DNS you get.

NOTE:
After you set the Pre-Shared Key, please remember your SSID and the Pre-Shared Key to connect with your wireless LAN.

Press for about 2~3 seconds, the system LED indicator keep solid light, it means WPS working, while press for about 10 seconds, all LEDs blinks quickly, the device will restore to factory default settings.

- 12 Try any website to test the Internet. Here we type in www.totolink.net.

Router Quick Setup by Wi-Fi Devices

- 1 Click Settings—Wi-Fi.
- 2 Select your TOTOLINK model no., no password required by default.
- 3 When connected, the Web page will pop up automatically.
- 4 You could enter admin for both User name and Password. Click Login.